


Note: All values are based on a 42" truck frame height and are rounded to the nearest inch. Values are subject to change without notice.

FEATURE DIMENSIONS		REACH 2-STAGE   3-STAGE		RATING 2-STAGE   3-STAGE	
A	Centerline of Rear Tandem to Tailboard	67"		—	
B	530 U/L Retracted Reach w/Forks	72"		53,000 lbs.	
	565 3-Stage Coach U/L Retracted Reach w/Forks	87"		56,500 lbs.	
	565 4-Stage U/L Retracted Reach w/Forks	73"		56,500 lbs.	
C	530 U/L Extended Reach w/Forks	142"		17,000 lbs.	
	565 3-Stage Coach U/L Extended Reach w/Forks	181"		17,600 lbs.	
	565 4-Stage U/L Extended Reach w/Forks	174"		17,600 lbs.	
D	Recovery Boom Retracted Reach at 0°	18"	30"	—	
	Recovery Boom Retracted Reach at 30°	-20"	-9"	100,000 lbs.	
	Recovery Boom Retracted Reach at 40° (Max)	-43"	-34"	—	
	Recovery Boom Extended Reach at 0°	174"	291"	—	
	Recovery Boom Extended Reach at 30°	115"	217"	30,000 lbs.	22,000 lbs.
E	Recovery Boom Extended Reach at 40° (Max)	76"	166"	—	
	Boom Working Height to Hook at 30°	244"	302"	—	
F	Boom Working Height to Hook at 40° (Max)	294"	369"	—	
	Boom Max Height at 40° (Max)	329"	404"	—	
G	530 U/L Retracted Reach w/Forks	36"		—	
	565 3-Stage Coach U/L Retracted Reach w/Forks	40"		—	
	565 4-Stage U/L Retracted Reach w/Forks	40"		—	

The 50 ton—like all Jerr-Dan underlifts—has full cycle power tilt. This feature allows the operator to have tilt capabilities in positive or negative grade lift positions. The positive and negative tilt allows you to pick vehicles up on uneven terrain, while maintaining clearance between the undercarriage and underlift.

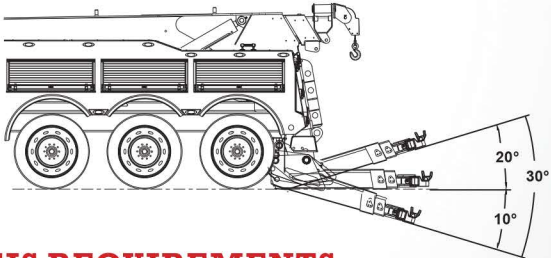

RECOMMENDED CHASSIS REQUIREMENTS

50 TON INTEGRATED	TANDEM	TRI-AXLE
Min Chassis GVWR	64,000 lbs.	64,000 lbs.
Min Cab to Drive Tandem (Clear CT)	174"	214"
Min Frame RBM (each rail)*	4,200,000 in-lbs.	4,200,000 in-lbs.
Min FAWR*	18,000 lbs.	18,000 lbs.
Min RAWR	46,000 lbs.	46,000 lbs.
Max Unloaded Frame Height	45"	45"
Min Frame Length Behind Rearmost Axle	43"	43"

\*Higher minimums are required if mounting in combination with a Side Recovery System (SRS). Refer to SRS sales literature for requirements.

STANDARD FEATURES

- 2 or 3-Section High-Strength Hydraulic Boom
- Wrecker Boom Winches
  - Dual Planetary 50,000 lbs. Capacity
  - 3/4 in. x 250 ft. Wire Rope w/ 360° Swivel Hooks
  - Air Cable Tensioners & Free Spool
- High-Performance Polymer Slide Pads
- Boom Mounted D-Rings
- Driver & Passenger Side Proportional Controls
- Driver & Passenger Side Hyd. Pressure Gauges
- 3-Location Multiplex Electrical Controls
- 2-Location Multiplex Air Controls
- Telescoping Rear Stabilizers w/Integrated Fold-Down Spade Feet
- Recessed Glad Hand & 7-Pin Connectors
- LED Amber Main & Auxiliary Light Bars
- LED Upper & Lower Hook-Up Lights
- LED Upper Work Lights
- LED Underlift Lights
- Jerr-Dan Boom/Body Logos
- Custom JFB Signature Badge

OPTIONAL:

- Wireless Proportional Remote Control or Non-Proportional (All Boom Functions)
- 6 Side & 2 Rear Emergency Flashers (CA Compliant)
- 39" & 51" Tunnel Compartments
- Aluminum Dress Up Kit

See your Jerr-Dan dealer for more options and accessories.

ACCESSORIES

- Counterweight Options:
  - Front Casted Counterweight/Tunnel Counterweight
  - Ranging from 1500–3500 lbs./3000–6500 lbs.
- Available SRS 25 & SRS 35
- Rigging Kits Available
- Storage Solution Kits
- Back-Up Camera

UNDERLIFT FEATURES

- Retracted Lift Capacity & Reach (Off Tailboard):

Model	Capacity	Reach
530	53,000 lbs.	72 in.
565 3-Stage	56,500 lbs.	87 in.
565 4-Stage	56,500 lbs.	73 in.

- Extended Lift Capacity & Reach (Off Tailboard):

Model	Capacity	Reach
530	17,000 lbs.	142 in.
565 3-Stage	17,600 lbs.	181 in.
565 4-Stage	17,600 lbs.	174 in.

- Max Towing Height & Negative Power Tilt:

Model	Tow Height	Neg. Tilt
530	36 in.	20°
565 3-Stage	40 in.	17°
565 4-Stage	40 in.	17°

- 3 or 4-Section High-Strength Hydraulic Boom
- 14,000 lbs. or 25,000 lbs. Tire Lift Option
- HD Tie-Down Straps, Chain Hook Adapters, Forks & Spring Lift Brackets Included
- 70° Side Pivoting Low Profile Cross Bar w/ 5" Pin
- Underlift Camera (Option)

YOUR JERR-DAN DEALER:

THE 50 TON INTEGRATED WRECKER



Eastern Wrecker Sales, Inc  
www.easternwrecker.com - 919-553-4038

An Oshkosh Corporation Company. The Jerr-Dan name and Jerr-Dan logo are registered trademarks of Oshkosh Corporation, ©2015 Jerr-Dan Corporation.



# JFB BODY SERIES

## ROLL UP READY FOR ANYTHING

The JFB Body Series delivers what matters most: performance, innovation and dependability.

- Increased storage capacity
- Storage for towing equipment & rigging organization
- Incident management-oriented design
- Aluminum roll-up doors for improved compartment access & operator visibility
- Access & egress that meets the highest standard in body construction
- Rotator-style control stations
- LED interior compartment & DOT lighting for enhanced nighttime operations
- Limited Lifetime Warranty\*—transferable for greater return on investment
- Sectional rubber-mounted body for greater shock-absorbing performance
- Diamond tread and anti-skid surfaces for service access to top of body
- LED-lighted steps & grab handles for nighttime tailboard access
- Load-rated access & tool storage areas

The JFB body series is available in a gold or silver series. Gold offers pre-set storage solutions (for a “turn-key” unit), and the silver series allows the operator to organize the interior.

**SRS (Side Recovery System)** option with pivoting recovery boom allows for recovery ability on either side of the unit. Mounted behind the cab, the SRS (with 37” tool compartments) puts functional weight toward the front of the unit for increased towing performance.



\*48 business hours from notification, valid in North America only, some restrictions apply. Limited lifetime warranty provided only by the body supplier and not Jerr-Dan. For more information or to obtain a copy of the limited lifetime warranty, contact Jerr-Dan warranty department.

An Oshkosh Corporation Company. The Jerr-Dan name and Jerr-Dan logo are registered trademarks of Oshkosh Corporation, ©2015 Jerr-Dan Corporation.




ENGINEERED FOR  
INCIDENT MANAGEMENT

### THE JFB BODY SERIES WORKS HARDER AND LASTS LONGER

Meet the strongest body on the market—the JFB. Its rugged, non-corrosive exterior, made of weather-tight and impact-resistant polypropylene, is so durable it comes with a limited Lifetime Warranty on the body. And, its roll-up aluminum doors, strategically placed LED lights and engineered storage solutions prove it has more than just brawn—it's got the brains too.

\*The JFB body is available for tandem and tri-axle chassis.



POLY TIRE LIFT  
ORGANIZER



ADJUSTABLE SHELVING



LIFT ATTACHMENT  
STORAGE  
(18 SETS OF FORKS)

NON-CORROSIVE POLY  
CONSTRUCTION



CHAIN CAROUSEL  
OIL DRY SILO



50,000 lbs. 2-SPEED  
PLANETARY WINCHES

FABRICATED BOOM  
AND UNDERLIFT  
WELDMENTS

5-INCH STEEL CENTER  
PIN AND STEEL  
BUSHING

AUTOMOTIVE WIRING  
HARNESSES AND  
CONNECTIONS

WIDENED SPADE FOOT

Jerr-Dan 50 Ton Integrated JFB Wrecker



ROTATOR-STYLE  
CONTROL  
STATIONS

LED COMPARTMENT  
LIGHTING



RECOVERY  
RIGGING  
STORAGE



TILT DOWN  
TRAYS



POWER  
DISTRIBUTION  
CENTER



LED WORK  
LIGHTING

LOAD RATED  
HANDLES / STEPS  
W/ ANTI-SLIP  
TEXTURING



MULTI-PLEX  
LIGHTING

WINCH FREE-SPOOL  
CONTROLS

### THE WRECKER THAT GOES THE EXTRA MILE

Reach farther and lift more with Jerr-Dan 50 Ton Wreckers. Jerr-Dan offers this unit with a 2-stage or a 3-stage recovery boom unmatched in reach and capacity. Configure this unit with either the 530 (3-stage) or 565 (3 or 4-stage) underlift, and this unit will bring the towing AND recovery performance demanded in today's industry. Whether it's handling standard lifts, or tasking complex rollovers, the Jerr-Dan 50 Ton Wreckers offer best-in-class performance. Now built with the JFB Body, Jerr-Dan completes the package with more for your business: more towing performance, more storage, more time-saving organization. And the result? More to your bottom line.