



# MODEL 317/318 TRAVELING AXLE

**35 OR 50 TON**

The 317 and 318 trailers feature a one-piece, 4-beam frame designed with low-load and a 29" full width, rigid flat approach plate. Operators can easily and safely load a wide variety of equipment without the use of ramps or blocks, eliminating the possibility of damage from high centering or dragging the load over an abrupt approach. The Landoll approach plate can be used for additional load deck space and has four tie down chain slots. The 317 series is ideal for transporting forklifts, asphalt pavers, and other low profile equipment.



**Eastern Wrecker Sales, Inc.**

## **Field Installed Options**


- Optional 62,000 lb. Dock Level Hydraulics
- Load from Ground to 57" Dock Height
- Self Contained Hydraulic Power
- Dock Level Hydraulics
- Remote Controls
- Bulkheads



- Easy to Operate Hydraulic Controls
- Selector Valve for Dock Legs



- Additional Loaded Deck Space
- Equipped with Four Tie Down Slots
- Full Width Flat Approach Plate, No Hinge
- Load a Wide Variety of Equipment

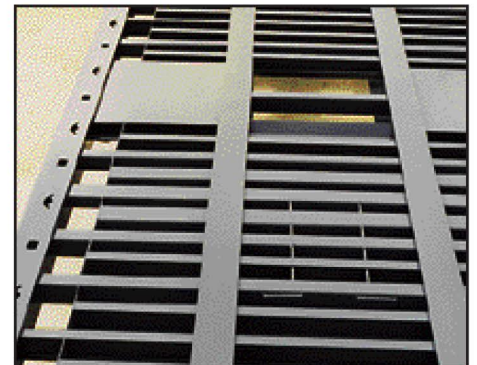

- Fabricated Four I-Beam Frame
- Jr. I-Beam on 8" Centers
- Heavy Duty Steel Plate Over Wheels



**Proven Solutions for Your Hauling Needs!**

**Eastern Wrecker Sales, Inc**

**www.easternwrecker.com - 919-553-4038**





# Standard & Optional Equipment / Features

## Model 317 / 318 Traveling Axle



S=Standard O=Optional

MODEL 318	50 TON	100,000 lb.
MODEL 317	35 TON	70,000 lb.
<b>MAIN FRAME</b>		
- Fabricated 100,000 PSI and 80,000 PSI Yield Steel	S	S
- Four Beam Frame Design	S	S
- Capacity - 70,000 lb. Distributed 50,000 lb. Concentrated in 10'	S	S
- Capacity - 100,000 lb. Distributed 70,000 lb. Concentrated in 10'	S	S
<b>KINGPIN SETTING</b>		
- 24" Setting / 70 1/2" Swing Clearance	S	O
- 18" Setting / 76 1/2" Swing Clearance	O	S
- 26" Setting / 74 1/2" Swing Clearance	S	S
<b>CROSSMEMBERS</b>		
- 4" Jr. I-Beams on 8" Centers	S	S
- 4" Jr. I-Beam on 8" Centers	S	S
<b>DECK AND ACCESSORIES</b>		
- 48', 50', 53' Overall Length	O	O
- 102" Width	S	S
- 96" Width (Consult Factory)	S	S
- 38" Deck Height (Loaded)	S	S
- 1 3/4" Apitong Wood Deck	S	S
- 1/8" Steel Tread Plate	S	S
- 45° Slope Drop	S	S
- 24" Pull-Out Side Extension or 12" Outrigger Swing Out	S	S
- Flat Approach Plate with Four Key Hole Tie Downs	S	S
- Load Angles 8 1/2°	S	S
- Extra Web Mounted Lights	S	S
- Forklift Package (Additional Crossmembers / Capacity)	S	S
- Deck Strap 1 1/4" x 9" (for Track Area)	S	S
- Rub / Chain Rail - Web Mount	O	O
- Skid Plate for Container 3/4" x 6"	O	O
- Toe Board 3/8" x 2 1/2" on Lower Deck	S	S
- Twin Upper Deck Mounted Tool Box with Lockable Door	S	S
- Web Mounted Tool Box, Lower Deck	O	O
<b>WINCHES AND ACCESSORIES</b>		
- Worm Gear 12,000 lb. with 85' of 1/2" Cable	S	S
- Worm Gear 20,000 lb. with 85' of 5/8" Cable	O	O
- Planetary Winch	O	O
- Pivoting Cable Roller Guide for Winch (Top Deck Only)	O	O
- Cable Roller Guide for Winch	O	O
- Air Tension / Air Operated Winch Free Wheel (Available with Pivoting Cable Roller Guide - 20,000 lb. Winch Top Deck Mount)	O	O
- Location for Second Winch Available for All Winch Sizes	S	S
- Multi-Function Wireless Remote Control	O	O
- LED Winch Lights	O	O
- Bolt-On "D" Ring at Winch	O	O
<b>TIE DOWNS / CHAIN GOTCHAS</b>		
- Double Key Hole Chain Slots Located on 32" Centers	S	S
- Alternating Stake Pockets on 32" Centers	S	S
- Extra Recessed Mounted "D" Rings - Lower Deck Only	O	O
- Extra Flush Mounted "D" Rings	O	O
- Ratchet Winch for 4" Nylon Strap - Weld On	O	O
<b>BULKHEADS</b>		
- 16" / 24" 2-Position Bulkhead / Front Extension (Solid)	O	O
- 48" High Mesh, 96" or 102" Width	O	O
- Bolt-On Binder Storage Rack for 48" Bulkheads	O	O
- LED Work Light - Dual (Mounted on Bulkhead)	O	O

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

MODEL 318	50 TON	100,000 lb.
MODEL 317	35 TON	70,000 lb.
<b>PARKING STANDS</b>		
- Two Speed Landing	S	S
- Hydraulic Parking Stands	O	O
- Pin Drop	O	O
<b>AXLES</b>		
- (2) 25,000 lb. Dual Tire, Oil Bath Bearings	S	S
- (3) 25,000 lb. Dual Tire, Oil Bath Bearings	S	S
<b>SUSPENSION</b>		
- Neway RLU228 Air Ride, 22,500 lb. Capacity	S	S
- Spring Suspension Transpro Mono Leaf	O	O
- Dock Level Hydraulics - 62,000 lb.	O	O
- Two Pair of 62,000 lb. (Not Available with Spring Suspension or Low Profile Tires)	O	O
- Centralized Grease System	S	S
<b>BRAKES</b>		
- Automatic Slack Adjusters	S	S
- 12 1/4" x 7 1/2" Full Air / ABS 4S2M	S	S
- Steel Out Board Brake Drums	S	S
- Spring Brakes on 2 Axles	S	S
<b>OIL SEAL HUBS / RIMS</b>		
- Internal Mated Assembly	S	S
- 6 3/4" x 17 1/2" Tubeless 8 Hole Hub Pilot Disc Type	S	S
<b>TIRES</b>		
- 235/75R 17.5 Double Coin	S	S
- 235/75R 17.5 Michelin	O	O
- 255/R22 1/2 Goodyear Tires on Hub Pilot Type Rims	O	O
- 16 1/2" x 7" Full Air / ABS 4S2M	O	O
- 7 1/2" x 22 1/2" Tubeless 10 Hole Pilot Disc Type	O	O
Spare Tires and Rims Available in Standard & Optional Sizes		
- Spare Tire Carrier 48" Bulkhead, Front or Rear Mounted	O	O
- Dual Spare Tire Carrier 48" Bulkhead, Front Mounted	O	O
<b>WHEEL ACCESSORIES</b>		
- Stainless Steel Wheel Covers - 6 3/4" x 17 1/2"	O	O
- Hubometer (Not Available with Stainless Steel Wheel Covers)	O	O
<b>HYDRAULIC POWER SOURCE</b>		
- Quick Couplers / 2,500 PSI - 15 GPM	S	S
- Air Shift PTO and Wet Kit for Tractor - Not Installed	O	O
- 25 HP Engine Pkg.*	O	O
*Slope Mounted, Upper Deck or Front Extension Mount		
- Engine Cover for Upper Deck or Extension Mount	O	O
<b>AIR / ELECTRICAL CONNECTION</b>		
- Glad Hand 7-Way Receptacle	S	S
<b>WIRING HARNESS / LIGHTS</b>		
- Grote "Ultra Blue Seal" System	S	S
- Grote LED Rubber Grommet Mounted with 10-Year Warranty	S	S
- Center Mounted Side Turn Signal	S	S
<b>FINISH / COLOR</b>		
- Steel Grit Shot Blast to Bright Metal	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green		
<b>WEIGHT</b>		
- 48' - 17,000 lbs. (approximate base)	S	S
- 48' - 20,000 lbs. (approximate base)	S	S

**Proven Solutions for Your Hauling Needs!**  
**Remember: Quality is Always a Bargain!**

**Eastern Wrecker Sales, Inc**  
**www.easternwrecker.com - 919-553-4038**