



OPTION



# MODEL 855C-HD NITROGEN STINGER TRAILER



Eastern Wrecker Sales, Inc.

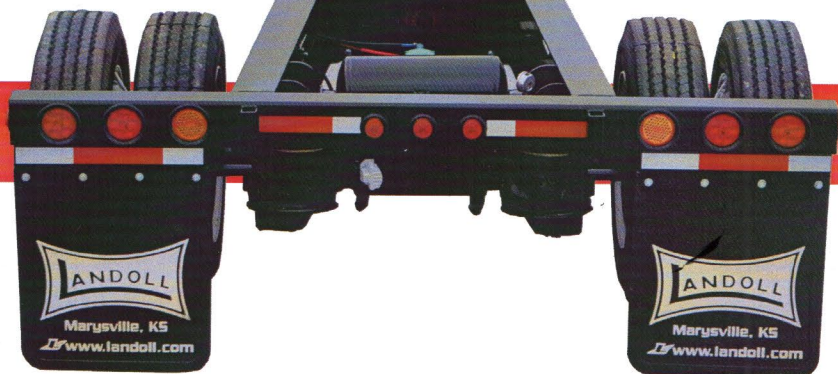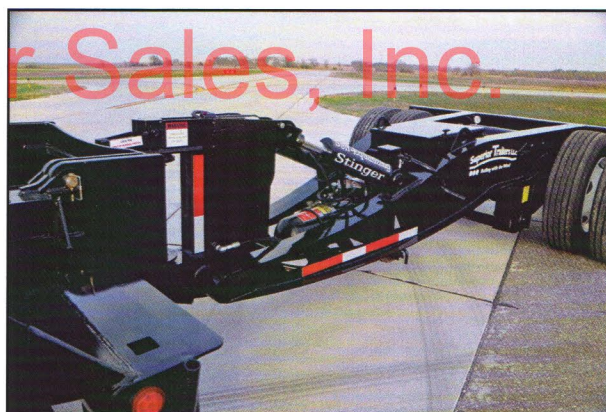

**Proven Solutions for Your Hauling Needs!**

Eastern Wrecker Sales, Inc

[www.easternwrecker.com](http://www.easternwrecker.com) - 919-553-4038








# Standard & Optional Equipment / Features

## Model 855C-HD Nitrogen Stinger Trailer

S=Standard O=Optional

MODEL 855C-HD	55 TON	110,000 lbs.
<b>MAIN FRAME</b>		
- Fabricated 13" Beam 100,000 PSI Flange		S
<b>KINGPIN SETTING</b>		
- Dual Pins 15" and 33"		S
<b>CROSSMEMBERS</b>		
- 8" Hi Tensile I-Beams on 24" Centers		S
<b>LOADED GROUND CLEARANCE</b>		
- 6.5"		S
<b>LOADED DECK HEIGHT</b>		
- 19.5"		S
<b>SWING CLEARANCE</b>		
- Dual Swing, 108" and 90"		S
<b>GOOSENECK, DECK AND ACCESSORIES</b>		
- 102" Wide		S
- Full 2" Apitong Track Area		S
- 12'5" Dual Drop-In Kingpin Settings with 7-Position Fifth Wheel Ride Height		S
- Front Brackets for Flip Extension		S
- 4th Axle or 14'6" Stinger Ready (3+1 Configuration)		S
- 12" Swing-Out Outriggers		S
- HD Sloped Front Approach with Traction Bars		S
- 6' Recessed Bucket Trough at Rear of Lower Deck		S
- Open Boom Trough with V-Type Bumper		S
<b>TIE DOWNS / CHAIN GOTCHAS</b>		
- (24) Total, All Angled D-Rings, 7 Each Side Lower Deck, 1 on End of Each Bolster, 2 at Rear of Lower Deck, 2 at Top of Rear Slope, 2 at Rear of Trunnion		S
<b>STORAGE AREA</b>		
- 1 each Between Main Frame at Front of Lower Deck 41" W x 24" L x 10" D		S
<b>BOLSTERS</b>		
- Half Front Bolster with Traction Bars, Lowered Bolster Between Tires (20,000 lb. Capacity); Rear Bolster (17,500 lb. Capacity)		S
<b>SUSPENSION / AXLES</b>		
- Neway Air Ride 25,000 lb. Capacity with Mechanical Ride Height Control Valve		S
- Centralized Grease System - All Axles		S
- (3) 25,000 lb. Dual Tire, Oil Bath Bearings 54" Spacing		S
- 60" Axle Spacing (Changes Deck / Trailer Length)		O

MODEL 855C-HD	55 TON	110,000 lbs.
<b>TRUNNION</b>		
- Boom Trough Cover		O
- Nitrogen Stinger-Single 25,000 lb. Air Ride Axle (14'1" Spread)		O
(3) 25,000 lb. Includes 275 Tires-Self-Contained Honda Engine Package		O
- Nitrogen Spreader Bar-Includes Self-Contained Honda Engine Package and Brackets for Flip Axle (Flip Axle Assembly. for 54" Spread will Create a Total Spread of 14'1")		O
<b>CYLINDERS</b>		
- Main Gooseneck Cylinders Horizontally Mounted		S
<b>BRAKES</b>		
- 16.5x7 Full Air with Spring Brakes on 3 Axles, ABS 4S2M		S
<b>TIRES / RIMS</b>		
- 275/70R 22.5 LRH Double Coin		S
- 22.5x8.25		S
- Hub Pilot / Steel Outboard Brake Drums		S
<b>HYDRAULIC HOOK UP</b>		
- Hydraulic Quick Couplers / 2,500 PSI - 15 GPM		S
<b>LIGHTS</b>		
- Grote "SuperNova" LED 10-Year Warranty		S
- Grote "Ultra-Blue Seal" Wiring Harness 7-Year Warranty		S
<b>FINISH / COLOR</b>		
- 400° Bake / Steel Grit Shot Blast to Bright Metal		S
- Zinc Rich Powder Primer		S
- TGIC Polyester Powder Coat		S
White, Black, Yellow, Blue, Red, Green		S
<b>WEIGHT (BASE)</b>		
- 25,400 lbs. +/- 3%		S
ESTIMATED WEIGHT		

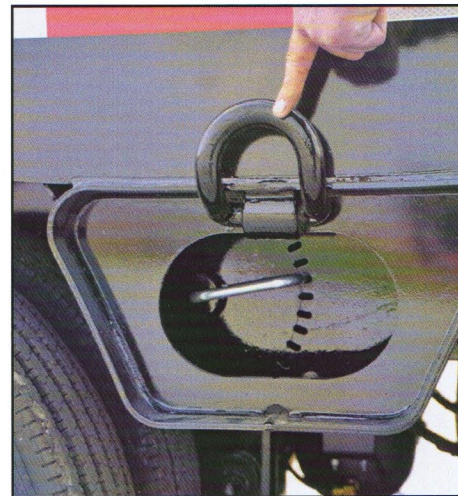

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

**Proven Solutions for Your Hauling Needs!**

**Remember: Quality is Always a Bargain!**

**Eastern Wrecker Sales, Inc**

**www.easternwrecker.com - 919-553-4038**

