




MODEL LT1016 UTILITY TAG TRAILER



Eastern Wrecker Sales, Inc.

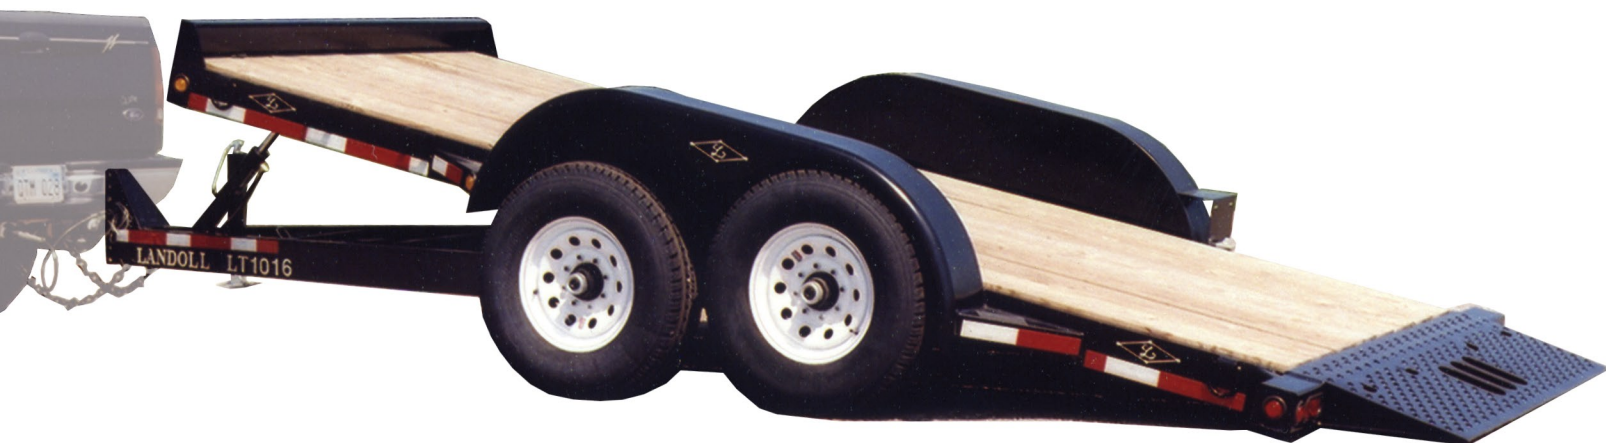

A 6" channel iron frame under the main frame for superior strength. A solid formed 6" height headboard for protection. (Stake pockets shown for optional removable sideboards)

Proven Solutions for Your Hauling Needs!



Eastern Wrecker Sales, Inc
www.easternwrecker.com - 919-553-4038



Standard & Optional Equipment / Features

Model LT1016 Utility Tag Trailer



S=Standard O=Optional

MODEL LT1016 TILT DECK

DIMENSIONS

- 16' Flat Deck
- 22" Loaded Deck Height
- 80" Wide Between Fenders
- 102" O/A Width

S
S
S
S

CAPACITY

- 10,000 lbs.
- 3,150 lb. Trailer Weight
- 13,150 lb. GVWR

S
S
S

MAIN FRAME

- 6" Channel
- 4" Jr. I-Beam, 80,000 PSI Yield on 24" Centers
- 6" Channel Hitch Frame
- Tool Box Under Deck

S
S
S
S

AXLES

- (2) 6,000 lb. Torflex, E-Z Lube

S

TIRES AND BRAKES

- LT235/80R16 LRE
- Both 12"x2" Electric Brakes

S
S

DECK

- 2" Nominal CA-B Cooper Azote Treated Pine
- (4) 5/8" D-Rings
- Stake Pockets 2 per Side
- Sideboards

S
S
S
O

TILT DECK

- 2 1/2" x 16" Cushion Cylinder
- Approach Plate Landoll Traction Plate
- Load Angle - 12.5°

S
S
S

ACCESSORIES

- Fenders - HD 14 Gauge with Back
- Running Boards with Anti-Skid Tape
- White, Black or Yellow Powder Coat Paint
- 8,000 lb. Ramsey Electric Winch
- Spare Tire Carrier

S
S
S
O
O

PHOTOS MAY SHOW OPTIONAL EQUIPMENT



The hitch adjusts from 12" to 24" vertically.



Loading angle as low as 12.5°.



A full-width rear light bar and Landoll traction plate makes loading small wheel machines efficient.



The cushion cylinders tilt the bed to ground position and back to transport position smoothly.



A heavy-duty bed lockdown with safety latch firmly secures the bed in transport position.



14-gauge molded fenders and anti-slip steps for strength and safety.

Proven Solutions for Your Hauling Needs!
Remember: Quality is Always a Bargain!

Eastern Wrecker Sales, Inc
www.easternwrecker.com - 919-553-4038