

850XT EXTENDABLE DETACH



PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!
1-800-428-5655 | www.landoll.com/trailers


850XT Extendabl



- Easily Adjust Ground Clearance from 6" to 20"
- Transport at 7 Height Positions while the Neck Remains Locked
- Optional Chain / Binder Rack Between Arms



- Optional Stop Tail Turn with Work Light Gooseneck Mounted
- Storage Between Main Frame at Front of Lower Deck with Weight Bearing Lockable Lids

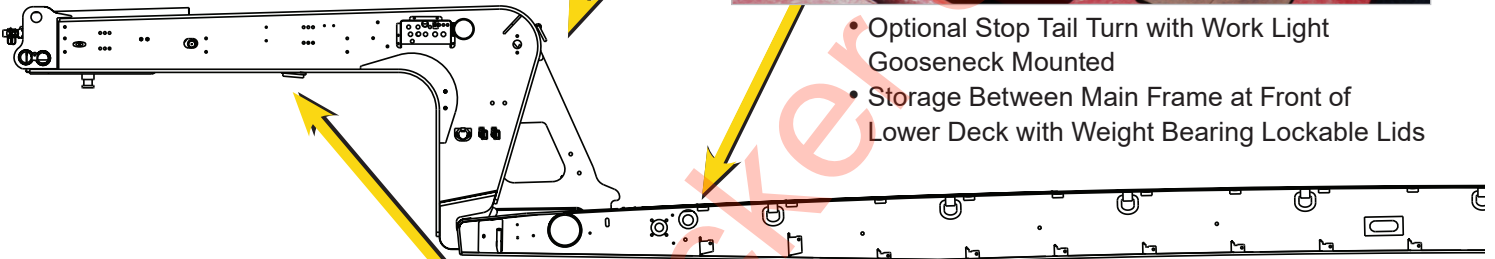

- Pin-On Assist Ramp
- Traction Bars on Approach
- Keyhole Tie Downs on Approach




- Angled D-Rings, 12" Swing-Out Riggers, Secondary Locations for Hydraulic Quick Couplers
- Lift Assist Storage Rack for Optional Bus Ramps
- Three Mounting Locations for Hydraulic Winches – Gooseneck, Front, and Rear of Trunnion

1-800-428-5655


Detach - Features




- Rear Mounted Control Panel for Enhanced Work Lights, Extendable Locks, Ride Height Controls, All Mounted at Rear of Lower Deck
- Optional Wireless Remote Control for Winches

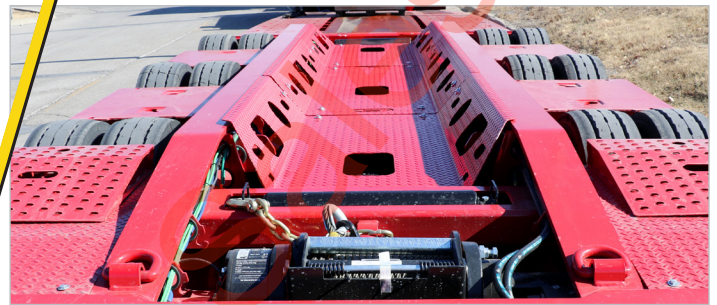

- Full Length Recessed Boom Trough
- Dropped Wheel Bolster
- No Front Crossmember in Slope

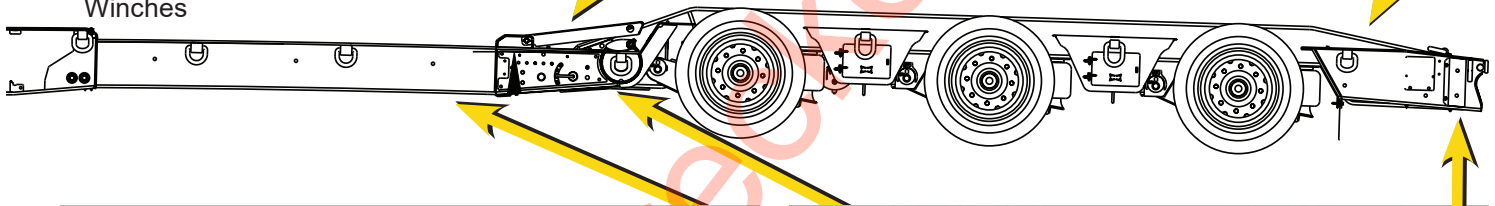

- 4 Position Extendable Lower Deck, Closed, 2½', 5', or 8' Lock Positions
- Soft Transitions from Front Approach to Rear Bumper
- Ramp Filler with Adjustable Slope Ramp for Safe Transition to Trunnion

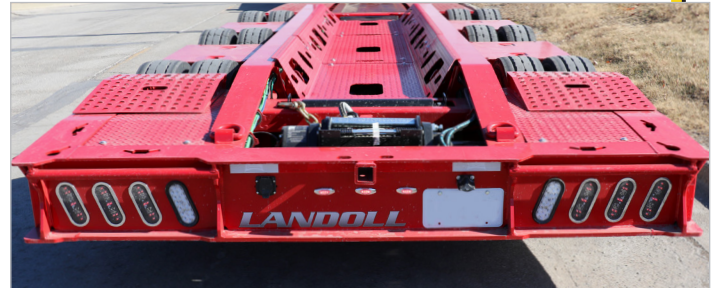

- Rear Ramp Brackets, Air / Electrical Couplers
- 42" Rear Deck Area
- Four Light Combo – High Visibility LED Lights, Stop-Tail-Turn Strobe (STD)
- 2½" Hitch Receiver with Electrical Outlet for Accessory Lights

STANDARD & OPTIONAL EQUIPMENT/FEATURES

Model 850XT Extendable Detach

S=Standard O=Optional

MODEL 850XT	50 TON	100,000 lbs
MAIN FRAME		
- Fabricated Box Beam, 100,000 Yield PSI Flange		S
- Capacity 53' - 100,000 lbs in 16' (Capacity Reduces During Extending)		S
KINGPIN SETTING		
- 15" Pin Setting - 84" Swing Clearance		S
CROSSMEMBERS		
- 6" High Tensile I-Beams on 21" Centers		S
- Extra Crossmembers		O
GOOSENECK, DECK AND ACCESSORIES		
- 12" Outriggers for 24' Main Deck		S
- Quarter Front Bolster with Quick-Lift Drive Over Ramp		S
- Chain and Block Box at Rear of Main Deck Between Main Beams		S
- Boom Trough, 7 Prong Blade Electric Outlet at Rear for Accessory Lighting		S
- Three Pair Flag Holders		S
- Weight Bearing Bolsters Between Axles with Storage		S
- 42" Deck, with Loading Angle, Behind Rear Axle		S
- Gooseneck Bed Assembly, Aluminum or Steel		O
- Gooseneck Aluminum Cover Plate		O
- Battery Back-Up for Detached Lighting		O
- Bolt-On Chain and Binder Rack Between Lock Arms		O
- Gooseneck Mud Flaps		O
- Gooseneck Tail Light and Work Lights		O
- Fenders for Gooseneck		O
- 20,000 / 30,000 lb Winch In-Deck Mount (Mid and / or Rear), Gooseneck Mounted		O
- Bus Ramps - Front and Rear Combination (4 Pieces)		O
- Shock Straps		O
- Air Lift on 2nd or 3rd Axle		O
- Air Outlets, Rear Frame (Gooseneck Optional)		O
DECK AND FEATURES		
- 102" Wide		S
- Apitong in Track Area		S
- Landoll Hoses and Components Certified to -40°F		S
- Center Filled Wood Deck - Apitong		O
LOADED GROUND CLEARANCE		
- 6"		S
LOADED DECK HEIGHT		
- 22"		S
TIE DOWNS / CHAIN GOTCHAS		
- Perimeter Outer Flange Keyhole Gotchas		S
- Center Main Deck Keyhole Tiedowns - 21" Centers		S
- (33) Total - Angled and Flush Mounted D-Rings		S
- Neck: D-Rings 2 Each on Main Frame Rear Flush Mounted		S
- Trunnion: D-Rings 2 Each Flush Mounted Front and Rear on Top of Inner Beams, 1 Each Angled on Bolsters Between Axles		S
- Lower Deck: Web Mounted on 42" Centers		S

MODEL 850 XT	50 TON	100,000 lbs
STORAGE AREA		
- (1) Located Rear of Lower Deck		S
- (1) Located Behind Rear Axle		S
- Easy Access Side Door Storage in Bolsters		S
- Single or Dual Load Bearing Toolboxes Located at Front of Lower Deck		O
SUSPENSION / AXLES		
- DEXTER Air Ride with 25,000 lb Capacity Axles		S
- (3) 25,000 lb Axles, Dual Tire, Oil Bath Bearings		S
- 60" Axle Spacing		S
- Centralized Grease System		S
- Automatic Slack Adjusters - All Axles / Drum Brakes		S
- Air Raise and Lowering Valve with Quick Dump		S
- Air-Weigh Scale Options		O
- Right Weigh Scale		O
BRAKES		
- 12.25x7.5 Full Air with Spring Brakes ABS, 4S2M		S
- Air Disc Brakes		O
TIRES		
- 245/70R17.5 Michelin on 17.5x6.75 Tubeless Rims		S
- 235/75R17.5 Double Coin on 17.5x6.75 Tubeless Rims		O
- Meritor / PSI Tire Inflation		O
HYDRAULIC HOOK UP		
- Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max		S
LIGHTS		
- Grote Clear Lens LED with Shock Absorbing Surround (10 Year Warranty)		S
- Grote "Xtreme" Wiring Harness (7 Year Warranty)		S
- Strobe Light Package in Bumper		S
- Gooseneck Mounted Work Lights		O
- Trunnion Lighting		O
FINISH / COLOR		
- 400°F Bake / Steel Grit Shot Blast to Bright Metal		S
- Zinc Rich Powder Primer		S
- TGIC Polyester Powder Coat White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray		S
- Galvanizing		O
WEIGHT (BASE)		
- 48' - TBD		S
- 53' - 24,000 lbs (+/- 3%)		S
ESTIMATED WEIGHTS		

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



CALL 1-800-428-5655

REMEMBER: QUALITY IS ALWAYS A BARGAIN!

1900 North Street | Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779

SCAN FOR MORE

