



# 440


## TRAVELING SPREAD AXLE OPTION

**MODEL 440**  
**40 TON CAPACITY**




**Closed Tandem at 50"**


**Spreadable to 121"**

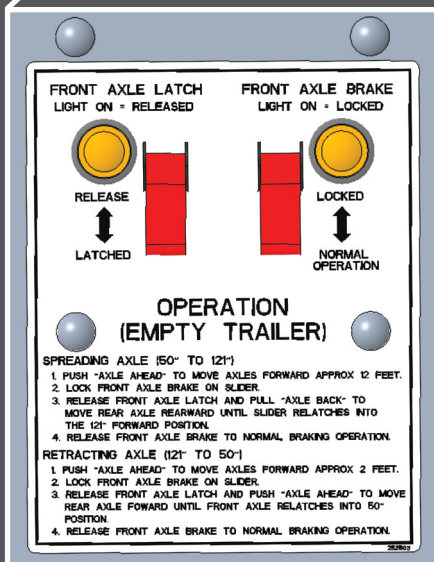

**Easy to Operate  
Control Panel**

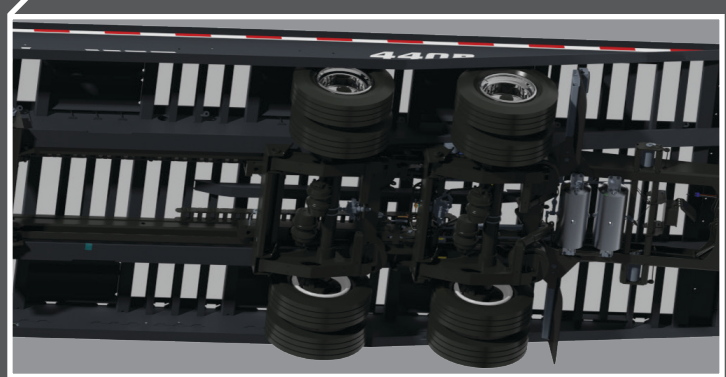

**CLOSED**

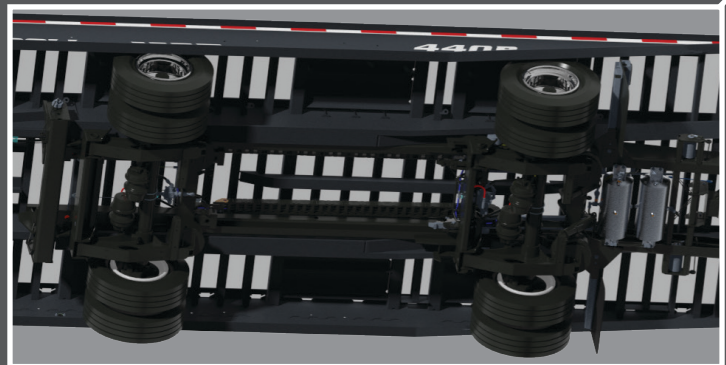

**SPREAD**

- Spread Axle Increases Flexibility of Loads
- Up to 40,000 lb Axle Group Rating
- Simple, Smooth Hydraulic Operation
- Safety Visual Indicators Show Axle Position
- Air-Weigh iWeigh Scale Option Offers Individual Axle Readings through Bluetooth

**PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!**

**919-553-4038**

**[www.easternwrecker.com](http://www.easternwrecker.com)**



# STANDARD & OPTIONAL EQUIPMENT / FEATURES

## Model 440 Traveling Spread Axle Option

*Only Available on the Model 440*

MODEL 440	40 TON	80,000 lb	MODEL 440	40 TON	80,000 lb
<b>MAIN FRAME</b>			<b>SUSPENSION / AXLES</b>		
- Fabricated 80,000 and 100,000 PSI Yield Beams	S		- SAF-Holland/Neway Air Ride RLU228,		S
- Four Beam Design	S		22,500 lb Capacity		
<b>KINGPIN SETTING</b>			- Dock Level Hydraulic 62,000 lb Capacity		O
- 21" Setting	S		(Not Available with 215/75R 17.5 Low-Pro Tires)		
- 83½" Swing Clearance	S		- Centralized Grease System		S
- 2" 5th-Wheel Kingpin Hitch	S		- (2) 25,000 lb Axles, Dual Tire, Oil Bath Bearings		S
<b>CROSSMEMBERS</b>			<b>BRAKES</b>		
- Alternating 4" and 3" Jr. I-Beam on 8" Centers	S		- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M		S
<b>WINCH</b>			- Disc Brake		O
- 12,000 lb Worm Gear with Spring Tension and 85' of ½" Cable	S		<b>TIRES / RIMS</b>		
- 20,000 lb Worm Gear with Spring Tension and 85' of ⅝" Cable	O		- 235/75R 17.5 Double Coin Tires on		S
- 20,000 lb Planetary 2-Speed and 85' of ⅝" Cable	O		17.5x6.75 Tubeless Rims		
- 30,000 lb Planetary 2-Speed and 85' of ⅝" Flex 9 Cable	O		- Michelin Tires or Continental Tires		O
<b>DECK AND FEATURES</b>			- All Axles Prepped for Tire Inflation		S
- 102" Wide	S		- Tire Inflation System		O
- Deck Rating 50,000 lb in 10'	S		- Hubodometer		O
- 90° Slope Drop	O		<b>HYDRAULIC HOOK UP</b>		
- 37" Deck Height	S		- Quick Couplers 2,500 PSI - 20 GPM at Controls,		S
(Loaded with 17.5 Tires and 48" King Pin Height)			50 GPM Max		
- 1⅜" Apitong Hardwood Deck	S		<b>LIGHTS</b>		
- 6.5° Load Angle	S		- Grote Rubber Grommet Mounted Annealed LED Lighting		S
- Landoll Hoses and Components Certified to -40°F	S		- Grote "Xtreme" Wiring Harness		S
<b>ACCESSORIES</b>			- Tow Mate Dual Function Work / Strobe Marker Lights		O
- Flat Approach Plate with 6 Keyhole Tie Downs	S		- Dual 2,200 Lumen Work Lamps		O
- Automatic Slack Adjusters	S		(Available in Multiple Mounting Locations)		
- Main Deck Center Slope Roller	S		- Underdeck Work Zone Lighting		O
- Upper Deck Slope Rollers	O		- Center Rear Strobe Light		S
<b>TIE DOWNS / CHAIN GOTCHAS</b>			- Mud Flap, Stop, Turn and Tail Lights		S
- Double Keyhole Chain Slots with Square Stake Pockets on 16" Centers	S		<b>FINISH / COLOR</b>		
<b>TOOL BOX (UPPER DECK, BOTH SIDES)</b>			- Steel Grit Shot Blast to Bright Metal		S
- Non-Weight Bearing Top Opening, Lighted Tool Box	S		- Zinc Rich Primer		S
- Weight Bearing Top Opening, Lighted Tool Box	O		- TGIC Polyester Powder Coat White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray		S
- Side Opening Door, Lighted Tool Box	O		- Galvanizing		O
<b>PARKING STANDS</b>			<b>WEIGHT (ESTIMATED)</b>		
- Jost Two Speed Landing Gear	S		- 440-50' CA — TBD Consult Factory		S
- Pin Drop	O		- 440-53' — TBD Consult Factory		S
<b>More Options Available. Please Consult Factory.</b>					
Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.					



**CALL 1-919-553-4038**

**REMEMBER: QUALITY IS ALWAYS A BARGAIN!**

Eastern Wrecker Sales Inc 13401 Clayton Blvd, Clayton, NC 27520 authorized distributor

440 Spread Axle - 0425

SCAN FOR MORE