




MODEL 900 SERIES TRAVELING TAIL



- Reduce Maintenance Cost with Centralized Grease System
- Individual Zerk for Each Service Point Including Slacks and S-Cams
- Easily Accessible from Rear of Trailer at One Location

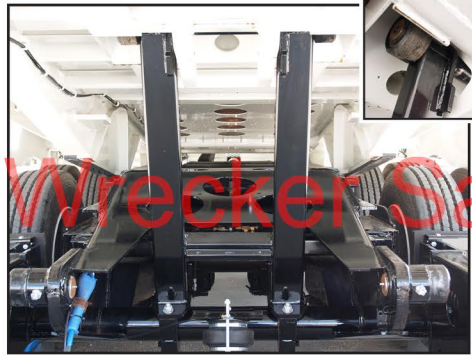

- Stable, Rigid Dock Arm Engages in Pockets under Tail
- Tail Raises to Match Dock Height up to 57" High
- Air Bag Inflates to Engage Dock Arm while the Undercarriage Travel Raises the Tail



- Grote "Ultra-Blue" Wiring Harness with LED Lighting System
- Grote Supplied Multi-Year Warranty
- Plug 'n Go Modular Design with Double Seal Technology Provides Protection from Moisture and Contaminants



- Low Load Angle on Tail
- Allows for Loading Low Clearance Equipment
- Standard Double Keyhole Tie Downs
- Optional Landoll Steel Traction Plate for Increased Traction



- Lighted Control Panel
- One Hydraulic Control to Load and Unload Trailer
- One Hydraulic Control for Winch
- Optional Wireless Remote Control
- Adds Driver Safety and Efficiency



- Optional Upper Deck Air Ramp
- Low Profile Design for Ease of Loading Upper Deck
- Landoll Traction Plate on Slope and Ramp for Added Safety
- Spring Loaded Ramp Supports Hex Pivot Shaft with Sealed Bearings



Proven Solutions for Your Hauling Needs!

Eastern Wrecker Sales, Inc

www.easternwrecker.com - 919-553-4038



Standard & Optional Equipment / Features

Model 900 Series Traveling Tail



S=Standard O=Optional

MODEL 950	50 TON	100,000 lbs.
MODEL 930	35 TON	70,000 lbs.
MAIN FRAME		
- Fabricated 80,000 and 100,000 PSI	S	S
- Four Beam Design	S	S
- Capacity - 70,000 lb. Distributed / 50,000 lb. Concentrated in 10'	S	
- Capacity - 100,000 lb. Distributed / 70,000 lb. Concentrated in 10'		S
KINGPIN SETTING		
- 18" Setting	S	S
- 84" Swing Clearance	S	S
CROSSMEMBERS		
- 4" Jr. I-Beam on 8" Centers	S	S
DECK AND FEATURES		
- 102" Wide	S	S
- 90° Slope Drop	S	S
- 38" Deck Height (Loaded)	S	S
- 1 3/8" Nominal Apitong (Lower Deck)	S	S
- 20" Loaded Ground Clearance	S	S
TAIL		
- 12' (15° Load Angle)	S	S
Model 930 / 950-45-12 (Lower Deck Length 35'3")	S	S
Model 930 / 950-48-12 (Lower Deck Length 38'3")	S	S
- 15' (11° Load Angle)	S	S
Model 930 / 950-48-15 (Lower Deck Length 38'3")	S	S
Model 930 / 950-51-15 (Lower Deck Length 41'3")	S	S
- Flush Double Key Hole Side Chain Slots	S	S
- Flat Approach Plate with (6) Tie Down Keyholes	S	S
- Apitong Wood Covered	S	S
- Lifting Capacity - 24,000 lb.	S	S
TIE DOWNS / CHAIN GOTCHAS		
- Double Key Hole Chain Slots / Gotchas on 16" Centers	S	S
TOOL BOX		
- Twin Lockable Upper Deck Mounted with Lockable Door (7" H x 34" W x 29" D)	S	S

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

MODEL 950	50 TON	100,000 lbs.
MODEL 930	35 TON	70,000 lbs.
WINCHES AND ACCESSORIES		
- Upper Deck 12,000 lb. Worm Gear with 85" Cable with Wear Plate	S	S
- Upper Deck 20,000 lb. or 30,000 lb.	O	O
- Slope Mount Winch Optional - 12,000 lbs., 15,000 lbs., 20,000 lbs.	O	O
SLOPE RAMP		
- Upper Deck Ramp (Air Operated)	O	O
AXLES		
- (2) 25,000 lb. Dual Tire, Oil Bath Bearings	S	
- (3) 25,000 lb. Dual Tire, Oil Bath Bearings		S
SUSPENSION		
- Neway Air Ride RLU228 22,500 lb. Capacity with Manual Dump Valve	S	S
BRAKES		
- Automatic Slack Adjusters	S	S
- 12.25x7.5 Full Air with Spring Brakes	S	S
- ABS, Wabco 4S2M	S	S
TIRES / WHEELS		
- 235 75R 17.5	S	S
- Hub Pilot / Steel Outboard Brake Drum	S	S
RIMS		
- 17.5x6.75 Tubeless	S	S
HYDRAULIC POWER SOURCE		
- Truck Mount Air Shift PTO, Pump and Hydraulics Res	O	O
- Self Contained Hydraulic System Under Slope Mount or Upper Deck	O	O
- Hydraulic Quick Couplers 2,500 PSI - 15 GPM	S	S
ELECTRICAL		
- 7-Way Receptacle (Electrical)	S	S
- Grote "SuperNova" LED 10-Year Warranty, Wiring Harness Grote "Ultra Blue Seal" 7-Year Warranty	S	S
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green		
WEIGHT (ESTIMATED)		
- 930-48-12 16,300 lbs. +/- 3%	S	
- 930-51-15 18,000 lbs. +/- 3%	S	
- 950-48-12 19,000 lbs. +/- 3%		S
- 950-51-15 19,890 lbs. +/- 3%		S



Proven Solutions for Your Hauling Needs!

Remember: Quality is Always a Bargain!

Eastern Wrecker Sales, Inc

www.easternwrecker.com - 919-553-4038